
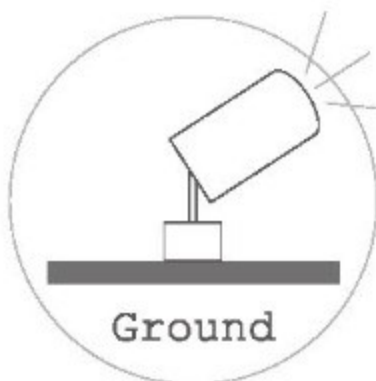
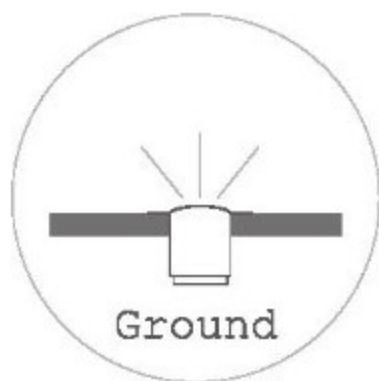
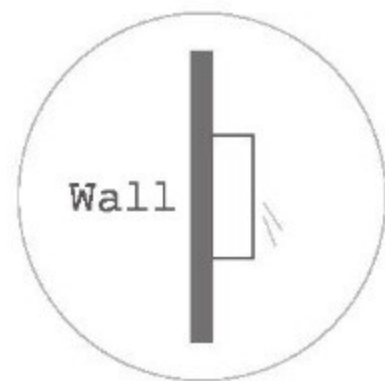
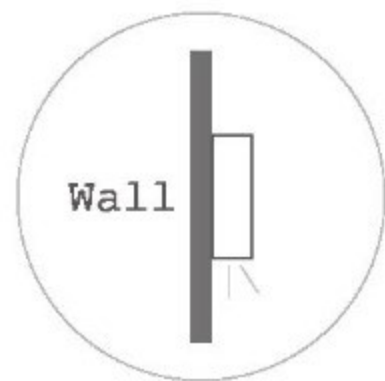
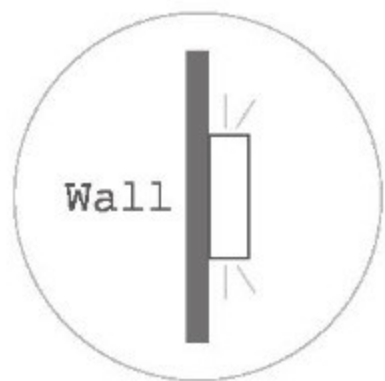
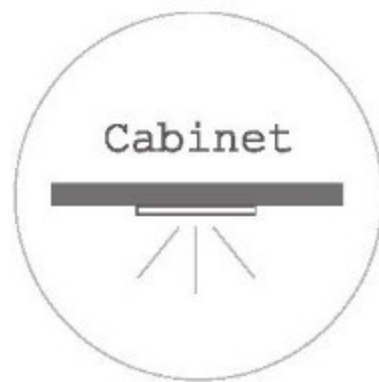
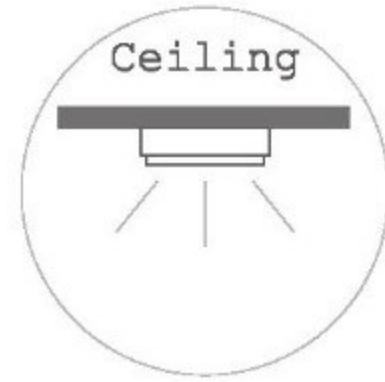
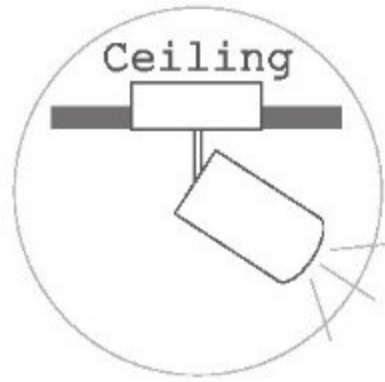
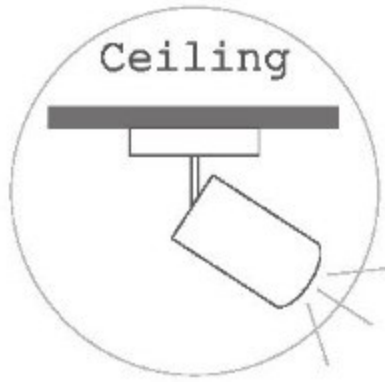
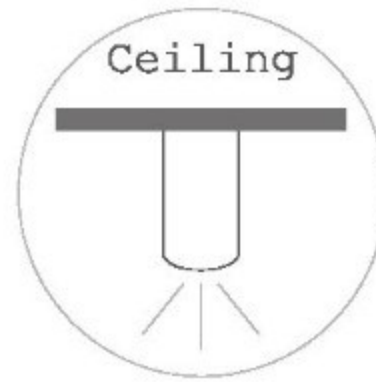



LIGHTING TYPES

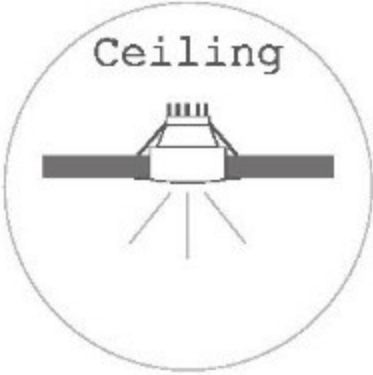

RECESSED DOWNLIGHT


	RD-Slim	RD-Stocky	RD-Tall
			
▸ Input Voltage	24VDC / 48VDC		
▸ Power	6W		12W
▸ CCT	3000K (Warm White)		
▸ CRI	97 RICH COLOR		
▸ Beam Angle	30 Degree	40 Degree	
▸ Tilted Angle	Fixed	Adjustable	
▸ Dimension	DIAM.41 x H70 (mm)	DIAM.75 x H57 (mm)	DIAM.88 x H110 (mm)
▸ Cut Hole	DIAM. 36 (mm)	DIAM. 65 (mm)	DIAM. 75 (mm)
▸ Dimmable	Yes		
▸ Control	LiFE, 0-10V, Dali		
▸ Housing	Cast Aluminium		
▸ Color	White / Black Silver (Optional)		
▸ LED Chip	Made in Japan		

SURFACE MOUNTED DOWNLIGHT

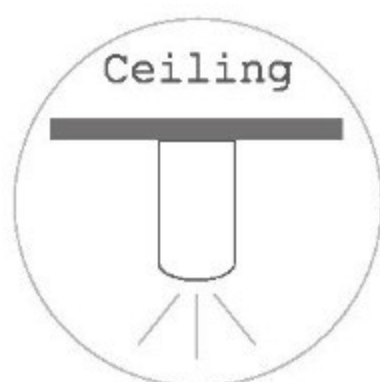


	SD-Stocky	SD-Tall
	Coming Soon	Coming Soon
▸ Input Voltage	24VDC / 48VDC	
▸ Power	6W	12W
▸ CCT	3000K (Warm White)	
▸ CRI	97 RICH COLOR	
▸ Beam Angle	40 Degree	
▸ Tilted Angle	Adjustable	
▸ Dimension	DIAM.100 x H90 (mm)	DIAM.125 x H150 (mm)
▸ Dimmable	Yes	
▸ Control	LiFE, 0-10V, Dali	
▸ Housing	Cast Aluminium	
▸ Color	White / Black Silver (Optional)	
▸ LED Chip	Made in Japan	

TRACK LIGHT SYSTEM

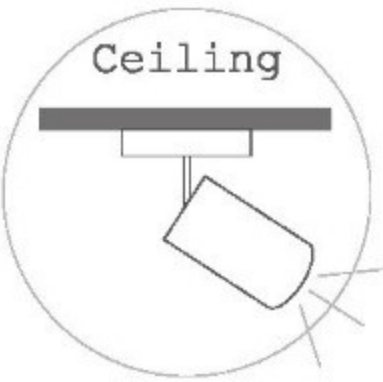	T-Track	T-Thin	T-Tone
			Coming Soon
▶ Input Voltage	24VDC / 48VDC		
▶ Power	N/A	6W	12W
▶ CCT	N/A	3000K (Warm White)	
▶ CRI	N/A	97 RICH COLOR	
▶ Beam Angle	N/A	30 Degree	40 Degree
▶ Dimension	Surface Mounted W26.2 x H22.2 x L2000 (mm) Recessed Trimless W26.2 x H47.2 x L2000 (mm)	DIAM.60 x H115 (mm)	DIAM.72 x H150 (mm)
▶ Dimmable	N/A	Yes	
▶ Control	N/A	LiFE, 0-10V, Dali	
▶ Housing	Cast Aluminium		
▶ Color	White / Black		
▶ LED Chip	N/A	Made in Japan	
▶ Connector	I / L / L Vertical	N/A	

LIGHT STRIP (FLEX)

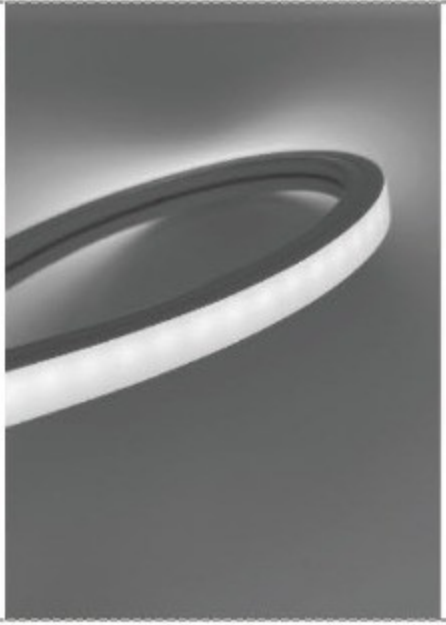	FS-83	FX-612	FX-1212
Top-Bend  Side-Bend 			
‣ Input Voltage	24VDC / 48VDC		
‣ Power	4W or 8W / Meter		
‣ CCT	3000K (Warm White)		
‣ CRI	90		
‣ Beam Angle	120 Degree		
‣ Bend	Top-bend	Side-bend	Top-bend or Side-bend
‣ Dimension	W8 x H3 x L5000 (mm)	W6 x H12 x L5000 (mm)	W12 x H12 x L5000 (mm)
‣ Dimmable	Yes		
‣ Control	LiFE, 0-10V, Dali		
‣ Housing	Aluminium	Silicon	Silicon

LIGHT STRIP (RIGID)



RT-77



RT-713



▶ Input Voltage	24VDC / 48VDC	
▶ Power	4W / Meter	4W or 8W / Meter
▶ CCT	3000K (Warm White)	
▶ CRI	90	
▶ Beam Angle	270 Degree	
▶ Bend	Rigid	
▶ Dimension	W7 x H7 x L250 - 1800 (mm)	W13 x H7 x L250 - 1800 (mm)
▶ Dimmable	Yes	
▶ Control	LiFE, 0-10V, Dali	
▶ Housing	Thermal Conductive Plastic	